



LUBRICATION AND PROCESS PRODUCT GUIDE

MINING & INDUSTRIAL APPLICATIONS

AUSTRALIA & NEW ZEALAND

**2024
EDITION**

**INCLUDES
QUANTM™ EODD PUMPS**



PUMPS | METERS | REELS

PROVEN QUALITY. LEADING TECHNOLOGY.



For complete range refer to the [Vehicle Service Equipment BUYER'S GUIDE \(303245\)](#)

For more information on Graco products and manuals please visit
www.graco.com or contact Customer Service 03 9468 8500 – csaustralia@graco.com

Contents

OIL PUMPS

- LD Series™
- Mini Fire-Ball 225
- Fire-Ball® 300
- Fire-Ball® 425
- NXT High-Flo Oil Pumps
- NXT Dura-Flo Oil Pumps
- Oil Pump Packages

GREASE PUMPS

- LD™ 50:1
- Mini Fire-Ball® 225
- Fire-Ball® 300
- Fire-Ball® 425
- GT 750
- NXT™ Check-Mate® Grease Pumps
- Grease Pump Packages

DISPENSE METERS

- EM® Series Electronic Meters
- PM Electronic Preset Meters
- SD Series™ Electronic Meters
- IM20 In-Line Electronic Meters
- SDV15 Control Valves
- XDV20 Control Valves

HOSE REELS

- Hose Reels Overview
- LDX™ Series Hose Reels
- SDX™ Series Hose Reels
- XDX™ Series 10/20 Hose Reels
- XD™ Series 30 Hose Reels
- XD™ Series 40/50 Hose Reels
- XD™ Series 60/70/80
Power Rewind Hose Reels
- Powered Reels Ordering information

ELECTRIC TRANSFER PUMPS

- EGP™ Pumps

HUSKY PUMPS

- Husky 205 AODD Pump
- Husky 515 AODD Pump
- Husky 716 AODD Pump
- Husky 1050 AODD Pump
- Husky 1590 AODD Pump
- Husky 2150 AODD Pump
- Husky 3300 AODD Pump

QUANTM PUMPS

- Quantm i30 1"
- Quantm i80 1.5"
- Quantm i120 2"

OIL PUMPS








Oil Pump Selection Guide

Pump Family and Fluid Pressure Ratio	Typical Applications	Annual Usage	Line Length	Simultaneous Dispense Points	Approx. Free Flow Rate @ 100 psi	Air Inlet	Fluid Inlet	Fluid Outlet	Air Operation Range	Description	Part Number
Fast-Ball, 100, 1:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	19,00 l (5,000 gal)	30 m (<100 ft)	1 (no reels)	44 lpm (12 gpm)	1/4 NPT(F)	1-1/2 NPT(F) 1 in	3/4 NPT(F) 1 in	40-150 psi (2.7-12.5 bar)	Universal Length Pump	279035 – NSA
										55 Gallon Drum Length Pump	279037 – NSA
*3a9292											
LD, 3:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Lube trucks Lubricant transfer Service shops 	75,000 l (20,000 gal)	91 m (300 ft)	1 to 2	30 lpm (7.8 gpm)	1/4 NPT(F)	1 NPT(F)	1/2 NPT(F)	20-150 psi (1.37-10.3 bar)	Pump Universal c/w bung adaptor	24G576 NPT – STK
										Pump Multilength	24G578 BSPT – STK
											24G579 NPT – STK
*3A1334											
LD, 5:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Lube trucks Lubricant transfer Service shops 	75,000 l (20,000 gal)	91 m (300 ft)	1 to 2	25 lpm (6.7 gpm)	1/4 NPT(F)	1 NPT(F)	1/2 NPT(F)	20-150 psi (1.37-10.3 bar)	Pump Universal c/w bung adaptor	24G588 NPT – STK
										Pump Multilength	24G590 BSPT – STK
											24G591 NPT – STK
*3A1334											
Mini Fire-Ball 225, 3:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	113,500 l (30,000 gal)	76 m (250 ft)	1 to 2	32 lpm (8.3 gpm)	3/8 NPT(F)	1-1/2 NPT(F)	1/2 NPT(F)	40-180 psi (2.8-12 bar)	Pump Universal	248097 – STK
											*309868
Fire-Ball 300, 5:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	132,000 l (35,000 gal)	152 m (500 ft)	1 to 3	46 lpm (12.1 gpm)	3/8 NPT(F)	1-1/2 NPT(F)	1/2 NPT(F)	40-180 psi (2.8-12 bar)	Universal oil pump	203876 – STK
										Oil pump, 60L (16gal)	203872 – NSA
										Oil pump, 200L (55gal)	204254 – STK
										Oil pump, 1040L (275gal)	222087 – STK
											*306518
Fire-Ball 425, 3:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	132,000 l (>35,000 gal)	76 m (Up to 250 ft)	3 to 4	109 lpm (28.7 gpm)	1/2 NPT(F)	1-1/2 NPT(F)	3/4 NPT(F)	40-180 psi (2.8-12 bar)	Universal oil pump	237526 – STK
											*308485
Fire-Ball 425, 6:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	132,000 l (>35,000 gal)	152 m (Up to 500 ft)	3 to 4	65 lpm (17.1 gpm)	1/2 NPT(F)	1-1/2 NPT(F)	3/4 NPT(F)	40-180 psi (2.8-12 bar)	Universal oil pump	238108 – STK
											*308608
Fire-Ball 425, 10:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	132,000 l (>35,000 gal)	228.6 m (Up to 750 ft)	3 to 4	44 lpm (11.7 gpm)	1/2 NPT(F)	1-1/2 NPT(F)	3/4 NPT(F)	40-180 psi (2.8-12 bar)	Universal oil pump	205626 – STK
											*308655

*Manual Number
 STK – Normally Stocked item in local warehouse
 NSA – Non-stocked item that will be delivered to local warehouse by air freight

NSO – Non-stocked item that will be delivered to local warehouse by ocean freight
 Free Flow – Flow rate measured at pump outlet (10w oil)

Oil Pump Selection Guide

Pump Family and Fluid Pressure Ratio	Typical Applications	Annual Usage	Line Length	Simultaneous Dispense Points	Air Inlet	Fluid Inlet	Fluid Outlet	Air Operation Range	Part Number
NXT High Flo, 3.5:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	132,000 l (> 35,000 gal)	76 m (Up to 250 ft)	4 to 5	3/4 NPT(F)	1-1/2 NPT(F)	1 NPT(F)	20-100 psi (1.4-7 bar)	24D602 – NSO *312862
NXT High Flo, 4.5:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	132,000 l (> 35,000 gal)	137 m (Up to 450 ft)	4 to 5	3/4 NPT(F)	1-1/2 NPT(F)	1 NPT(F)	20-100 psi (1.4-7 bar)	24D603 – NSO *312862
NXT Dura-Flo, 6:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	132,000 l (> 35,000 gal)	152 m (Up to 500 ft)	2 to 4	3/4 NPT(F)	2 NPT(F)	1-1/2 NPT(F)	20-100 psi (1.4-5.2 bar)	24D604 – NSO *312862
NXT Dura-Flo, 10:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	132,000 l (> 35,000 gal)	228.6 m (Up to 750 ft)	2 to 4	3/4 NPT(F)	2 NPT(F)	1-1/2 NPT(F)	20-100 psi (1.4-7 bar)	24D608 – NSO *312862
NXT Dura-Flo, 12:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	132,000 l (> 35,000 gal)	305 m (Up to 1000 ft)	2 to 4	3/4 NPT(F)	2 NPT(F)	1-1/2 NPT(M)	20-100 psi (1.4-7 bar)	24D605 – NSO *312862

*Manual Number

NSA – Non-stocked item that will be delivered to local warehouse by air freight

NSO – Non-stocked item that will be delivered to local warehouse by ocean freight

Oil Pump Packages

LDX NPT 3:1 OIL PACKAGES

Standard packages include LDX Series hose reel. Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 separately.



Package Number	24H702	24H726	24H751	24H800
Ratio	3:1	3:1	3:1	3:1
Mounting Position	Tote Top	Tote Drain	Cart (with Reel) 200L	Universal
Pump Part Number	24G576 NPT	24G576 NPT	24G576 NPT	24G576 NPT
Suction Tube Size	275 gal (1,040 l)	275 gal (1,040 l)	55 gal (205 l)	55 gal (205 l)
Pump Downtube	16F885		16F886	16F878
Reel Type	LDX	LDX	LDX	
Hose Reel Part Number	HEM004	HEM004	HEM004	
Hose Size	1/2 in x 35 ft	1/2 in x 35 ft	1/2 in x 35 ft	
Reel Bracket Kit	24K285	24K285		
Meter Type	Manual	Manual	Manual	Manual
Meter Part Number	25C903	25C903	25C903	25C903
Meter Extension	Rigid	Rigid	Rigid	Rigid
Hose Kit	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose
Hose Kit Part Number	24J495	24J495	24J495	24H859
Top Mount Tote Bracket	24F930	24F931		
Tote Mount Pump Bracket		24F920		
Meter Tray	24F914	24F914		
Suction Hose Kit		24H669		
Cart			24F915	
Additional Parts			100057 Screw 100527 Washer 111040 Nylock Nut	
Instruction Manual	3A1335	3A1335	3A1335	3A1335

Oil Pump Packages

LDX NPT 5:1 OIL PACKAGES

Standard packages include LDX Series hose reel. Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 separately.



Package Number	24H868	24H892	24H916	24H965
Ratio	5:1	5:1	5:1	5:1
Mounting Position	Tote Top	Tote Drain	Cart (with Reel) 200L	Universal
Pump Part Number	24G588 NPT	24G588 NPT	24G588 NPT	24G588 NPT
Suction Tube Size	275 gal (1,040 l)	275 gal (1,040 l)	55 gal (205 l)	55 gal (205 l)
Pump Downtube	16F885		16F886	16F878
Reel Type	LDX	LDX	LDX	
Hose Reel Part Number	HEM004	HEM004	HEM004	
Hose Size	1/2 in x 35 ft	1/2 in x 35 ft	1/2 in x 35 ft	
Reel Bracket Kit	24K285	24K285		
Meter Type	Manual	Manual	Manual	Manual
Meter Part Number	25C903	25C903	25C903	25C903
Meter Extension	Rigid	Rigid	Rigid	Rigid
Hose Kit	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose
Hose Kit Part Number	24J495	24J495	24J495	24H859
Top Mount Tote Bracket	24F930	24F931		
Tote Mount Pump Bracket		24F920		
Meter Tray	24F914	24F914		
Suction Hose Kit		24H669		
Cart			24F915	24F915
			100057 Screw 100527 Washer 111040 Nylock Nut	
Instruction Manual	3A1335	3A1335	3A1335	3A1335



GRACO
Mini Fine-Ball 225
A FLOWLINE PUMP

Part No.	225	Model	225	Country of Origin	USA
Rev.	00	Material	304 SS	Weight	0.15 lb
Year	2014	Dimensions	1.5" x 1.5" x 1.5"	Volume	0.001 cu in
Material	304 SS	Finish	Polished	Notes	See drawing for details

GRACO
Flowline Division
P.O. Box 1000
Piquette, MI 49661-1000
Tel: 616-776-7000
Fax: 616-776-7001
www.graco.com

Grease Pump Selection Guide

Pump Family and Fluid Pressure Ratio	Typical Applications	Annual Usage	Line Length	Simultaneous Dispense Points	Approx. Free Flow Rate @ 100 psi	Air Inlet	Fluid Outlet	Air Operation Range	Description	Part Number
LD, 50:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Lube trucks Lubricant transfer Service shops 	3,175 kg (Up to 7,000 lbs)	30.5 m (Up to 100 ft)	1	2 kg/min (4.5 lbs/min)	1/4 in NPT(F)	1/4 in NPT(F)	20-150 psi (1.37-10.3 bar)	16 kg (35 lb) Grease Pump 50:1 55 kg (120 lb) Grease Pump 50:1 180 kg (400 lb) Grease Pump 50:1	24G600 NPT – STK 246602 BSPT – STK 24G603 NPT – STK 246605 BSPT – STK 24G606 NPT – STK 246608 BSPT – STK
Mini Fire-Ball 225, 50:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	4,535 kg (Up to 10,000 lbs)	30.5 m (Up to 100 ft)	1	0.7 kg/min (1.5 lbs/min)	3/8 in NPT(F)	1/4 in NPT(F)	40-140 psi (2.8-10 bar)	16 kg (35 lb) Grease Pump – 50:1 55 kg (120 lb) Grease Pump – 50:1 180 kg (400 lb) Grease Pump – 50:1	246909 – NSA 246780 – NSA 246781 – NSA *309966
Fire-Ball 300, 15:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	4,535 kg (Up to 10,000 lbs)	76 m (Up to 250 ft)	1-2	3.4 kg/min (7.5 lbs/min)	3/8 in NPT(F)	1/4 in NPT(F)	40-180 psi (2.8-12.5 bar)	16 kg (35 lb) Grease Pump – 15:1 55 kg (120 lb) Grease Pump – 15:1 180 kg (400 lb) Grease Pump – 15:1	206405 – NSA 206699 – NSA 206700 – STK *306531
Fire-Ball 300, 50:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	4,535 kg (Up to 10,000 lbs)	76 m (Up to 250 ft)	1-2	3.4 kg/min (7.5 lbs/min)	3/8 in NPT(F)	1/4 in NPT(F)	30-140 psi (2.1-9.7 bar)	16 kg (35 lb) Grease Pump – 50:1 55 kg (120 lb) Grease Pump – 50:1 180 kg (400 lb) Grease Pump – 50:1	239877 – STK 239887 – STK 239888 – STK *308883
Fire-Ball 425, 10:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	9,072 kg (> 20,000 lbs)	152 m (Up to 500 ft)	4 or more	13.1 kg/min (29 lbs/min)	1/2 in NPT(F)	1 in NPT(F)	40-180 psi (2.8-12.5 bar)	Stubby mount 10:1 pump Fire-Ball 425, 10:1 pump – Includes Bung Adaptor	965124 – STK 965129 – STK *309407
Fire-Ball 425, 50:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	9,072 kg (> 20,000 lbs)	76 m (Up to 250 ft)	4 or more	4.1 kg/min (9 lbs/min)	1/2 in NPT(F)	3/8 in NPT(F)	40-150 psi (2.8-10.3 bar)	55 kg (120 lb) Grease Pump – 50:1 180 kg (400 lb) Grease Pump – 50:1	205394 – STK 205395 – STK *306674
Fire-Ball 425, 75:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	9,072 kg (> 20,000 lbs)	152 m (Up to 500 ft)	4 or more	2.9 kg/min (6.5 lbs/min)	1/2 in NPT(F)	3/8 in NPT(F)	40-100 psi (2.8-7 bar)	16 kg (35 lb) Grease Pump – 75:1 55 kg (120 lb) Grease Pump – 75:1 180 kg (400 lb) Grease Pump – 75:1	239731 – NSA 239729 – STK 239730 – NSA *308777
GT 750, 36:1 	<ul style="list-style-type: none"> Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Mining 	9,072 kg (> 20,000 lbs)	76 m (Up to 250 ft)	4 or more	14.5 kg/min (32 lbs/min)	1/2 in NPT(F)	1 in NPT(F)	40-100 psi (2.8-7 bar)	Universal Pump 55 kg (121 lb) 180 kg (400 lb)	24W498 – STK 25D116 – STK 24W337 – STK *3A5363








*Manual Number

STK – Stocked item in local warehouse

NSA – Non-stocked item that will be delivered to local warehouse by air freight

NSO – Non-stocked item that will be delivered to local warehouse by ocean freight

Grease Pump Selection Guide

Pump Family and Fluid Pressure Ratio	Typical Applications	Annual Usage	Air Inlet	Fluid Outlet	Air Operation Range	Description	Part Number
Check-Mate 14:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	9,072 kg (> 20,000 lbs)	3/4 in NPT(F)	1-1/2 in NPT(M)	0-100 psi (0-7 bar)	Stand Mount with DataTrak	247979 – STK *312376
Check-Mate 14:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	9,072 kg (> 20,000 lbs)	3/4 in NPT(F)	1-1/2 in NPT(M)	0-100 psi (0-7 bar)	Stand Mount without DataTrak	24E006 – STK *312376
Check-Mate 26:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	9,072 kg (> 20,000 lbs)	3/4 NPT(F)	1-1/2 in NPT(M)	0-100 psi (0-7 bar)	Stand Mount without DataTrak	24E007 – STK *312376
Check-Mate 29:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	9,072 kg (> 20,000 lbs)	3/4 in NPT(F)	1-1/2 in NPT(M)	0-100 psi (0-7 bar)	Stand Mount without DataTrak	24E008 – STK *312376
Check-Mate 55:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	9,072 kg (> 20,000 lbs)	3/4 NPT(F)	1-1/2 in NPT(M)	0-100 psi (0-7 bar)	Stand Mount without DataTrak	24E009 – STK *312376
Check-Mate 63:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	9,072 kg (> 20,000 lbs)	3/4 in NPT(F)	1-1/2 in NPT(M)	0-100 psi (0-7 bar)	Stand Mount without DataTrak	24E010 – STK *312376
Check-Mate 68:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	9,072 kg (> 20,000 lbs)	3/4 NPT(F)	1-1/2 in NPT(M)	0-100 psi (0-7 bar)	Stand Mount without DataTrak	24E011 – STK *312376

*Manual Number

STK – Stocked item in local warehouse

NSA – Non-stocked item that will be delivered to local warehouse by air freight

NSO – Non-stocked item that will be delivered to local warehouse by ocean freight

Grease Pump Packages

35 LB & 400 LB GREASE PACKAGES








Package Number	24J030	24J042	24J066
Description	Kit 35# Drum NPT	Kit 400# Drum NPT	Kit 400# Cart with Reel NPT
Ratio	50:1	50:1	50:1
Type of Package	Stationary	Stationary	Stationary
Container Size	16 kg (35 lb)	180 kg (400 lb)	180 kg (400 lb)
Pump Part Number	24G600	24G606	24G606
Hose Kit	24H862	24H862	24J501
Hose Sizes	Grease 1.8 m (1/4 in ID x 6 ft) Air/Water 1.8 m (3/8 in ID x 6 ft)	Grease 1.8 m (1/4 in ID x 6 ft) Air/Water 1.8 m (3/8 in ID x 6 ft)	Grease 1.8 m (1/4 in ID x 6 ft) Air/Water 1.8 m (3/8 in ID x 6 ft)
LDX Hose Reel			HEH006
Follower Plate	24F901	24F903	24F903
Drum Cover	24F904	24F906	24F906
Grease Valve	242056	129581	129581
Z-Swivel	202577	129591	129591
Cart			24F915
Additional Parts			100057 Screw 100527 Washer, 111040 Nylock Nut 150287 Coupling Pipe, 1/4 x 3/8 in
Instruction Manual	3A1335	3A1335	3A1335

DISPENSE METERS



Graco Dispense Meters

	Fluid	Manual/ Preset	Maximum Working Pressure	Maximum Flow Rate	Intended Use	Extension	Inlet inc (mm)	Part Number
EM Series Electronic Meters 	Oil Anti-freeze	Manual	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor	Flex Rigid	1/2 (13) NPT	EM8 25C904 – STK 25C903 – STK
						Flex Rigid	3/4 (19) NPT	EM20 25C918 – STK 25C919 – STK
PM Series Electronic Meters 	Petroleum and synthetic-based oils (motor, gear and ATF) Antifreeze	Preset	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor	Flex	1/2 (13) NPT	PM8 273157 – STK
						Rigid		273156 – STK 25U085 – STK
						Rigid	3/4 (19) NPT	PM20 273167 – STK
						Flex		273168 – STK
SD Series Electronic Meters 	Oil	Manual/ Preset	1,500 psi (103.4 bar)	14 gpm (53 lpm)	Indoor/ Limited Outdoor	Flex Rigid	1/2 (13) NPT	26C354 – STK 26C384 – STK
						Flex Rigid	3/4 (19) NPT	26C361 – STK 26C360 – STK
IM20 In-Line Meters 	Oil Anti-freeze	In-Line	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor		3/4 (19) NPT	25C841 – STK
IM20P In-Line Meter 	Petroleum and synthetic-based oils (motor, gear and ATF) Antifreeze	In-Line	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor		1/2 (13) NPT	133480 – NSA
SDV15 Control Valves 	Oil Anti-freeze	N/A	1,500 psi (103.4 bar)	15 gpm (56.8 lpm)	Indoor/ Outdoor	Flex Rigid	1/2 (13) NPT	247713 – STK 247712 – STK
XDV20 Control Valves 	Oil Anti-freeze	N/A	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor	Rigid	1/2 (13) NPT 3/4 (19) NPT	247718 – NSA 247722 – STK
						Flex	1/2 (13) NPT 3/4 (19) NPT	247721 – STK 247723 – STK

STK – Stocked item in local warehouse

NSA – Non-stocked item that will be delivered to local warehouse by air freight

NSO – Non-stocked item that will be delivered to local warehouse by ocean freight



Rigid



Flex

HOSE REELS



Hose Reels Overview

	Typical Application	Typical Fluid	Hose/Cord Length Options	Enclosed
LDX™ Series 	<ul style="list-style-type: none"> • Small maintenance shops • Tire maintenance shops • Small fast lubes • Independent repair facilities • Industrial manufacturing facilities 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Air • Water • Grease • Antifreeze • Windshield washer fluid • Diesel exhaust fluid (DEF) 	<ul style="list-style-type: none"> • 14 m (45 ft) – DEF only • 15 m (50 ft) 	No
SDX™ 10 / 20 Series 	<ul style="list-style-type: none"> • Car dealerships • Light-/medium-duty truck dealers • Fleet maintenance • Public works garages • Construction vehicle maintenance • Light-utility service trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Air • Water • Grease • Antifreeze • Windshield washer fluid 	<ul style="list-style-type: none"> • 11 m (35 ft) • 15 m (50 ft) • 20 m (65 ft) 	Optional
XDX™ 10 / 20 Series 	<ul style="list-style-type: none"> • Heavy-duty truck dealers • Fleet maintenance • Mining maintenance • Public works garage • Construction vehicle maintenance • Heavy-duty mobile service trucks • Mining • Lube trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Air • Water • Grease • Antifreeze • Windshield washer fluid 	<ul style="list-style-type: none"> • 11 m (35 ft) • 15 m (50 ft) • 20 m (65 ft) 	Optional
XD™ 30 Series 	<ul style="list-style-type: none"> • Heavy-duty truck dealers • Fleet maintenance • Mining maintenance • Public works garage • Construction vehicle maintenance • Heavy-duty mobile service trucks • Mining • Lube trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Diesel fuel • Air • Water • Grease • Antifreeze • Windshield washer fluid • Pressure wash • Waste oil evacuation • Diesel exhaust fluid (DEF) 	<ul style="list-style-type: none"> • 11 m (35 ft) • 15 m (50 ft) • 20 m (65 ft) • 23 m (75 ft) 	No
XD™ 40 / 50 Series 	<ul style="list-style-type: none"> • Heavy-duty truck dealers • Fleet maintenance • Mining maintenance • Public works garages • Construction vehicle maintenance • Heavy-duty mobile service trucks • Agriculture • Lube trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Diesel fuel • Air • Water • Antifreeze • Waste oil evacuation 	<ul style="list-style-type: none"> • 11 m (35 ft) • 15 m (50 ft) • 23 m (75 ft) • 30 m (100 ft) 	No
XD™ 60 / 70 / 80 Series 	<ul style="list-style-type: none"> • Heavy-duty truck dealers • Fleet maintenance • Mining maintenance • Public works garages • Construction vehicle maintenance • Heavy-duty mobile service trucks • Agriculture • Lube trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Diesel fuel • Air • Water • Grease • Waste oil evacuation 	<ul style="list-style-type: none"> • 15 m (50 ft) • 23 m (75 ft) • 30 m (100 ft) • 46 m (150 ft) 	No

Other colours available

Hose Reels Selection Guide

LDX SERIES HOSE REELS

LDX REELS

Part Number	Fluid	Hose		Connection Size		Maximum Pressure PSI
		ID (in)	Length (ft)	Inlet (in)	Outlet (in)	
HEL010	Air/Water/Antifreeze/Windshield Washer Fluid	3/8	50	3/8 NPT	3/8 NPT	300
HEL015	DEF	1/2	45	1/2 NPT	1/2 NPT	150
HEM004	Oil	1/2	50	1/2 NPT	1/2 NPT	1,500
HEH006	Grease	3/8	50	3/8 NPT	3/8 NPT	4,060

SDX SERIES HOSE REELS

ARM IN OVERHEAD MOUNT POSITION

Assembled with hose, ball stop kit and roller guide. **Required hose inlet kit sold separately.**

Reel Size	Fluid	Hose		Connection Size		Maximum Pressure psi (bar)	Assembly Part Number	Recommended Hose Inlet Kit
		ID mm (in)	Length m (ft)	Inlet mm (in)	Outlet mm (in)			
SDX 10	Air/Water/Antifreeze/Windshield Washer Fluid	10 (3/8)	11 (35)	13 (1/2)	10 (3/8)	300 (20.7)	SDL23#	218549
		10 (3/8)	15 (50)	13 (1/2)	10 (3/8)	300 (20.7)	SDL25#	
		13 (1/2)	11 (35)	13 (1/2)	13 (1/2)	300 (20.7)	SDL33#	
SDX 20	Air/Water/Antifreeze/Windshield Washer Fluid	10 (3/8)	20 (65)	13 (1/2)	10 (3/8)	300 (20.7)	SDL56#	
		13 (1/2)	15 (50)	13 (1/2)	13 (1/2)	300 (20.7)	SDL65#	
SDX 10	Oil	13 (1/2)	11 (35)	13 (1/2)	13 (1/2)	2,000 (138)	SDM33#	
SDX 20		13 (1/2)	15 (50)	13 (1/2)	13 (1/2)	2,000 (138)	SDM65#	
SDX 10	Grease	6 (1/4)	15 (50)	10 (3/8)	6 (1/4)	5,000 (345)	SDH15#	
SDX 20		10 (3/8)	11 (35)	10 (3/8)	6 (1/4)	4,800 (331)	SDH23#	
		10 (3/8)	15 (50)	10 (3/8)	6 (1/4)	4,800 (331)	SDH55#	

SD SERIES HOSE REELS

ARM IN OVERHEAD MOUNT POSITION

Assembled with hose, ball stop kit and roller guide. **Required hose inlet kit sold separately.**

Reel Size	Fluid	Hose		Connection Size		Maximum Pressure psi (bar)	Assembly Part Number	Recommended Hose Inlet Kit
		ID mm (in)	Length m (ft)	Inlet mm (in)	Outlet mm (in)			
SD 20	Air/Water	13 (1/2)	15 (50)	13 (1/2)	13 (1/2)	300 (20.7)	25P957	218549
	Oil	13 (1/2)	15 (50)	13 (1/2)	13 (1/2)	2,000 (138)	25P962	
	Grease	10 (3/8)	15 (50)	10 (3/8)	6 (1/4)	4,800 (331)	25P968	218550

SD Series: SDL23# A = White, B = Blue

Note: Other colours available refer to catalogue 303245


Hose Reels Selection Guide

XDX SERIES HOSE REELS

XD MODELS (WITH ADJUSTABLE ARM)


Reel Assemblies

Assembly includes hose, ball stop kit and roller guide. **Required hose inlet kit sold separately.**

	Reel Size	Fluid	Hose (Included)		Connection Size		Maximum Pressure psi (bar)	Recommended Hose Inlet Kit	Assembly Part Number
			ID mm (in)	Length m (ft)	Inlet	Outlet			
	XDX 10	Air/Water/Antifreeze/Windshield Washer Fluid	10 (3/8)	15 (50)	1/2 NPSM(M)	3/8 NPT(M)	300 (20.7)	218549	XDL25#
			13 (1/2)	11 (35)	1/2 NPSM(M)	1/2 NPT(M)	300 (20.7)		XDL33#
		Oil	13 (1/2)	11 (35)	1/2 NPSM(M)	1/2 NPT(M)	2,000 (138)		XDM33#
		Grease	6 (1/4)	15 (50)	3/8 NPSM(M)	1/4 NPT(M)	5,000 (552)	218550	XDH15#
	XDX 20	Air/Water/Antifreeze/Windshield Washer Fluid	10 (3/8)	20 (65)	1/2 NPSM(M)	3/8 NPT(M)	300 (20.7)	218549	XDL56#
			13 (1/2)	15 (50)	1/2 NPSM(M)	1/2 NPT(M)	300 (20.7)		XDL65#
		Oil	13 (1/2)	15 (50)	1/2 NPSM(M)	1/2 NPT(M)	2,000 (138)		XDM65#
		Grease	10 (3/8)	15 (50)	3/8 NPSM(M)	1/4 NPT(M)	4,800 (331)	218550	XDH55#


BARE REELS*

Required hose inlet kit sold separately. Fluid hose not included.

	Reel Size	Fluid	Hose (Not Included)		Connection Size		Maximum Pressure psi (bar)	Recommended Hose Inlet Kit	Part Number
			ID mm (in)	Length m (ft)	Inlet	Outlet			
	XDX 10	Air/Water/Antifreeze/Windshield Washer Fluid	10 (3/8)	20 (65)	1/2 NPSM(M)	3/8 NPSM(F)	300 (20.7)	218549	XDL2D#*
		Oil	13 (1/2)	11 (35)	1/2 NPSM(M)	1/2 NPSM(F)	2,000 (138)		XDM3B#*
		Grease	10 (3/8)	11 (35)	3/8 NPSM(M)	3/8 NPSM(F)	8,000 (552)	218550	XDH1D#*
	XDX 20	Air/Water/Antifreeze/Windshield Washer Fluid	13 (1/2)	15 (50)	1/2 NPSM(M)	1/2 NPSM(F)	300 (20.7)	218549	XDL6D#*
		Oil	13 (1/2)	15 (50)	1/2 NPSM(M)	1/2 NPSM(F)	2,000 (138)		XDM6D#*
		Grease	10 (3/8)	15 (50)	3/8 NPSM(M)	3/8 NPSM(F)	8,000 (552)	218550	XDH5D#*

XD 30 SERIES HOSE REELS

Recommended Reels (other reels available – see PMG Guide 303245) Includes Hose, Ball Stop, & Guide unless otherwise noted*

	Reel Size	Fluid	Hose		Connection Size		Maximum Pressure psi (bar)	Part Number
			ID mm (in)	Length m (ft)	Inlet	Outlet		
	XD 30	Air/Water/ Antifreeze/ Windshield Washer Fluid	13 (1/2)	23 (75)	1/2 npsm(m)	1/2 npt(m)	300 (20.7)	HSLC8F
			19 (3/4)	15 (50)	3/4 npsm(m)	3/4 npt(m)	300 (20.7)	HSLD5F
		Oil	13 (1/2)	23 (75)	1/2 npsm(m)	1/2 npt(m)	1500 (103)	HSMC8F
			19 (3/4)	15 (50)	3/4 npsm(m)	3/4 npt(m)	1250 (86)	HSM5B HSM5F
			19 (3/4)	15 (50)	3/4 npsm(m)	3/4 npt(f)	2000 (138)	HSMDDA* HSMDDF*
		Grease	13 (1/2)	15 (50)	1/2 npsm(m)	1/2 npt(m)	5,000 (345)	HSHC5F
			13 (1/2)	15 (50)	1/2 npsm(m)	1/2 npt(f)	5,000 (345)	HSHCDF*
		Pressure Wash	9.5 (3/8)	23 (75)	1/2 npsm(m)	3/8 npt(m)	4,000 (276)	HSPB8F
		Fuel/Evacuation	25 (1)	9 (30)	3/4 npsm(m)	1 npt(m)	125 (8.6)	HSLE3F

*Bare reel


XDX 10/20 Series: XDH5D# A = White, B = Blue F = Yellow

Note: Other colours available refer to catalogue 303245

Hose Reels Selection Guide

XD 40/50 SERIES HOSE REELS

Recommended Reels (other reels available – see PMG Guide 303245) Includes Hose, Ball Stop, & Guide unless otherwise noted*

	Reel Size	Fluid	Hose		Connection Size		Maximum Pressure psi (bar)	Assembly Part Number – Yellow
			ID mm (in)	Length m (ft)	Inlet NPT(F)	Outlet NPT(M)		
 <p>Other colours available</p>	XD 40	Air/Water/Anti-Freeze/ Windshield Washer Fluid	19 (3/4)	30 (100)	1 npt(f)	3/4 npt(m)		24P334
			13 (1/2) 19 (3/4) 25 (1)	30 (100) 23 (75) 15 (50)	1 npt(f)	1 npt(f)	600 (41)	24P315*
			25 (1)	15 (50)	1 npt(f)	1 npt(m)	300 (21)	24P337
			19 (3/4)	30 (100)	1 npt(f)	1 npt(f)	600 (41)	24P318*
			XD 50	25 (1)	30 (100)	1 npt(f)	1 npt(m)	300 (21)
	XD 40	Oil	19 (3/4)	30 (100)	1 npt(f)	3/4 npt(m)	1,500 (103)	24P346
			25 (1)	15 (50)	1 npt(f)	1 npt(m)	1,275 (88)	24P349
			25 (1) 19 (3/4)	15 (50) 23 (75)	1 npt(f)	1 npt(f)	2,000 (138)	24P322*
			13 (1/2) 19 (3/4)	30 (100)	1 npt(f)	1 npt(f)	2,000 (138)	24P325*
			XD 50	25 (1)	23 (75)	1 npt(f)	1 npt(m)	1,275 (88)
	XD 40	Fuel	25 (1)	15 (50)	1 npt(f)	1 npt(m)	250 (17)	24P355
			25 (1)	15 (50)	1 npt(f)	1 npt(f)	600 (41)	24P318*
			25 (1)	30 (100)	1 npt(f)	1 npt(m)	250 (17)	24P489
			28 (1 1/2)	15 (50)	1 1/2 npt(f)	1 1/2 npt(m)	150 (10)	24P498
			XD 50	32 (1 1/4)	15 (50)	1 1/2 npt(f)	1 1/2 npt(f)	600 (41)
38 (1 1/2)	15 (50)	1 1/2 npt(f)		1 1/2 npt(f)	600 (41)	24P468*		
XD 40	Waste Oil Evacuation	1	23 (73)	1 npt(f)	1 npt(f)	600 (41)	24P318*	
XD 50		32 (11/4)	15 (50)	1 1/2 npt(f)	1 1/2 npt(f)	600 (41)	24P462*	

*Bare reel


Other colours available refer to catalogue 303245

Powered Reels Selection Guide




Reel Frames Only

XD 60 / XD 70 / XD 80 Hose Reels


Motor is not included and must be purchased separately.

Reel Size	Fluid	Hose Capacity of Reel m (ft)					Maximum Pressure psi (bar)	Weight lb (kg)	Inlet/Outlet Size F(NPT)	Part Number - Yellow	
		Hose ID in (mm)									
		13 (1/2)	19 (3/4)	25 (1)	38 (1-1/2)	51 (2)					
 XD 6010	Air/Water/Diesel Fuel	30 (100)	30 (100)	15 (50)	-	-	600 (41)	87 (39)	25 mm/25 mm (1 in/1 in)	24T105	
	Oil	30 (100)	30 (100)	15 (50)	-	-	3,000 (207)	88 (40)		24T108	
	Waste Oil Evac.	-	-	15 (50)	-	-	600 (41)	87 (39)		24T105	
	Grease	-	-	15 (50)	-	-	3,000 (207)	88 (40)		24T108	
XD 7010	Air/Water/Diesel Fuel	-	-	30 (100)	-	-	600 (41)	86 (39)		24T111	
	Oil	-	-	30 (100)	-	-	3,000 (207)	87 (39)		24T114	
XD 8010	Air/Water/Diesel Fuel	-	-	46 (150)	-	-	600 (41)	127 (58)		24T123	
	Oil	-	-	46 (150)	-	-	3,000 (207)	129 (58)		24T126	
XD 7015	Waste Oil Evac.	-	-	-	15 (50)	-	600 (41)	87 (39)		38 mm/38 mm (1-1/2 in/1-1/2 in)	24T117
	Diesel Fuel	-	-	-	20 (65)	-	600 (41)	87 (39)			24T117
XD 8015		-	-	-	30 (100)	-	600 (41)	129 (58)	24T129		
XD 7020	-	-	-	-	10 (33)	600 (41)	91 (41)	51 mm/51 mm (2 in/2 in)	24T120		
XD 8020	-	-	-	-	15 (50)	600 (41)	133 (60)		24T132		




Motor Assemblies – Pair with Frame-Only Models

	Part Number	Description
	24T892	Pneumatic motor assembly, reversible type. For installing motor to bare XD reel.
	24T891	Hydraulic motor assembly, reversible type. For installing motor to bare XD reel.
	24T888	24 VDC, 1/2 HP motor assembly, reversible type. For installing motor to bare XD frame.

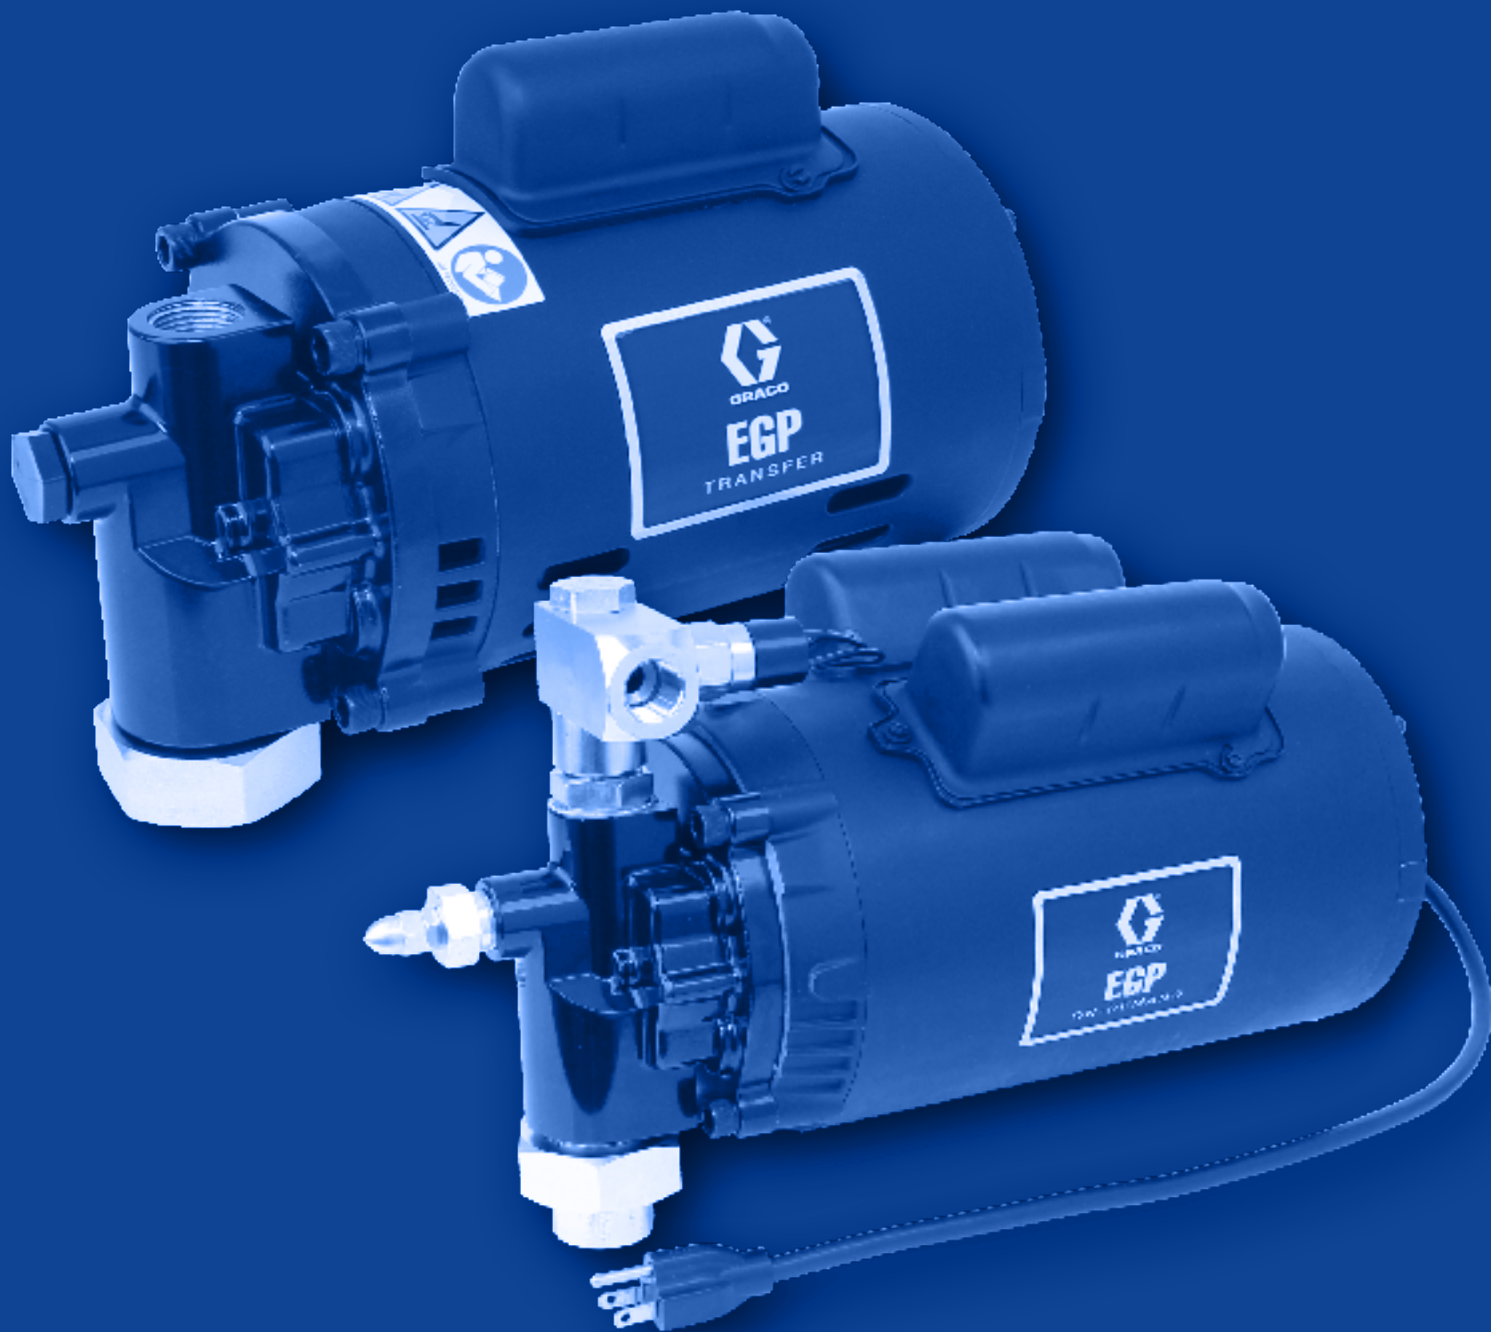
Ball Stop Kits

	Part Number	Description
	237873	Ball stop kit used for 3/4 in (19 mm) hose
	237874	Ball stop kit used for 1 in (25 mm) hose
	24R060	Ball stop kit used for 1.25 in (32 mm) hose
	24R061	Ball stop kit used for 1.5 in (38 mm) hose

Hose Guide

	Part Number	Description
	24T327	Stainless steel hose guide for XD 60
	24T328	Stainless steel hose guide for XD 70
	24T329	Stainless steel hose guide for XD 80
	24R072	Roller guide kit with bracket for XD 40 and XD 60
	24T330	Roller guide kit with bracket for XD 70
	24T331	Roller guide kit with bracket for XD 80
	127271	Pneumatic valve to control XD 60/70/80 pneumatic powered hose reels. 2-position, 3-way valve.

ELECTRIC TRANSFER PUMPS



EGP™ Transfer and EGP On-Demand



	EGP Transfer Pump Models		EGP On-Demand Pump Models
Package Part Number	25T819	25T821	–
Pump Part Number	–	–	25T818
Voltage	12 VDC	230 VAC	12 VDC
Hertz	–	50 Hz	–
Motor Type	TENV	ODP	TENV
Horsepower	1/2	1/2	3/4
Maximum Current (Amps)	30	4.4	60
Maximum Free Flow Rate gpm (lpm)	3.8 (14.4)	3.2 (12.1)	3.8 (14.4)
Maximum Pressure psi (bar)	65 (4.5)	65 (4.5)	325 (22.4)
Automatic Relief Setting psi (bar)	65 (4.5)	65 (4.5)	325 (22.4)
Inlet	1 in NPT	1 in NPT	3/4 in NPT
Outlet	3/4 in NPT	3/4 in NPT	1/2 in NPT
Bung Adapter	260061		
Dispense Kit	133376		–
Suction Kit	133375		–
Wetted Parts	Carbon steel with zinc plating, stainless steel, galvanized steel, aluminum, nitrile, rubber, PVC, PVC cement		Carbon steel with zinc plating, stainless steel, galvanized steel, aluminum, nitrile, rubber
Weight kg (lb)	11 (25)	11 (25)	16.3 (36)
Manual	3A8569	3A8568	3A8571

Note: Cable not included



Diaphragm Pump Selection Guide



Husky Series	Description	Part No.	Airmotor	Manifolds	Seats	Balls	Diaphragms	Typical Application
	Husky 3300 3" Husky 3300 3" Husky 3300 3" Husky 3300 3" Husky 3300 3"	652134 652090 652423 652404 652856	Aluminium Aluminium Poly Poly Poly	Aluminium ANSI/Flange/ BSPT Aluminium ANSI/Flange/ BSPT Poly/ANSI/DIN Poly/ANSI/DIN Poly/ANSI/DIN	Geolast TPE Santoprene Poly S/S	Geolast Acetal Santoprene PTFE PTFE	Geolast TPE Santoprene PTFE PTFE	Waste Oil, Diesel, etc same as Buna good abrasion resistance Hot Oil, Unleaded Fuel, Coolant typical lube application Chemical – Highest Diaphragm life where Santoprene is required Chemical Resistance where PTFE is required Highest Chemical Resistance where PTFE/Stainless is required
	Husky 2200 2" Husky 2200 2" Husky 2200 2" Husky 2200 2"	653504 653511 653500 653507	Poly Poly Poly Poly	Centre Poly ANSI Flange End Poly ANSI Flange Centre Poly ANSI Flange End Poly ANSI Flange	Poly Poly Poly Poly	PTFE PTFE Santoprene Santoprene	PTFE PTFE Santoprene Santoprene	Highest Chemical Resistance where PTFE is required Highest Chemical Resistance where PTFE is required Chemical – Highest Diaphragm life where Santoprene is required Chemical – Highest Diaphragm life where Santoprene is required
	Husky 2150 2" Husky 2150 2" Husky 2150 2" Husky 2150 2"	DF3525 DFC525 DF3GGG DFCGGG	Aluminium Aluminium Aluminium Aluminium	Aluminium NPT Aluminium BSP Aluminium NPT Aluminium BSP	TPE TPE Geolast Geolast	Acetal Acetal Geolast Geolast	TPE TPE Geolast Geolast	Oil, Hot Oil, Unleaded Fuel, Coolant typical Lube application Oil, Hot Oil, Unleaded Fuel, Coolant typical Lube application Waste Oil, Diesel etc same as Buna good abrasion resistance Waste Oil, Diesel etc same as Buna good abrasion resistance
	Husky 15120 1.5" Husky 15120 1.5" Husky 15120 1.5" Husky 15120 1.5"	654504 654511 654500 654507	Poly Poly Poly Poly	Centre Poly ANSI Flange End Poly ANSI Flange Centre Poly ANSI Flange End Poly ANSI Flange	Poly Poly Poly Poly	PTFE PTFE Santoprene Santoprene	PTFE PTFE Santoprene Santoprene	Highest Chemical Resistance where PTFE is required Highest Chemical Resistance where PTFE is required Chemical – Highest Diaphragm life where Santoprene is required Chemical – Highest Diaphragm life where Santoprene is required
	Husky 1590 1.5" Husky 1590 1.5" Husky 1590 1.5" Husky 1590 1.5"	DB3525 DBC525 DB3GGG DBC5GGG	Aluminium Aluminium Aluminium Aluminium	Aluminium NPT Aluminium BSP Aluminium NPT Aluminium BSP	TPE TPE Geolast Geolast	Acetal Acetal Geolast Geolast	TPE TPE Geolast Geolast	Oil, Hot Oil, Unleaded Fuel, Coolant typical Lube application Oil, Hot Oil, Unleaded Fuel, Coolant typical Lube application Waste Oil, Diesel etc same as Buna good abrasion resistance Waste Oil, Diesel etc same as Buna good abrasion resistance
	Husky 1050 1" Husky 1050 1" Husky 1050 1" Husky 1050 1" Husky 1050 1" Husky 1050 1" Husky 1050 1" Husky 1050 1" Husky 1050 HP	647666 647097 647040 647121 649006 649034 649001 649029 24W764/5	Aluminium Aluminium Aluminium Aluminium Poly Poly Poly Poly Aluminium	Aluminium NPT Aluminium BSP Aluminium NPT Aluminium BSP Centre Poly ANSI Flange End Poly ANSI Flange Centre Poly ANSI Flange End Poly ANSI Flange Aluminium NPT/BSPT	TPE TPE Geolast Geolast Poly Poly Poly Poly Geolast	Acetal Acetal Geolast Geolast PTFE PTFE Santoprene Santoprene Geolast	TPE TPE Geolast Geolast PTFE PTFE Santoprene Santoprene Buna	Oil, Hot Oil, Unleaded Fuel, Coolant typical Lube application Oil, Hot Oil, Unleaded Fuel, Coolant typical Lube application Waste Oil, Diesel etc same as Buna good abrasion resistance Waste Oil, Diesel etc same as Buna good abrasion resistance Highest Chemical Resistance where PTFE is required Highest Chemical Resistance where PTFE is required Chemical – Highest Diaphragm Life where Santoprene is required Chemical – Highest Diaphragm Life where Santoprene is required Chemical – Highest Diaphragm Life where Santoprene is required Waste Oil – Diesel – No Unleaded Fuel General Transfer
	Husky 716 3/4" Husky 716 3/4"	D53277 D5C277	Aluminium Aluminium	Aluminium NPT Aluminium BSP	Acetal Acetal	Buna Buna	Buna Buna	Oil, Waste Oil, Diesel, Coolant Typical Lube application. No ULP Oil, Waste Oil, Diesel, Coolant Typical Lube application. No ULP
	Husky 515 1/2" Husky 515 1/2" Husky 515 1/2" Husky 515 1/2" Husky 515 1/2"	D52966 D5B966 D55A11 D5EA11 D51277	Poly Poly Poly Poly Poly	Poly NPT Poly BSP Poly NPT Poly BSP Poly NPT	Poly Poly PVDF PVDF Poly	Santoprene Santoprene PTFE PTFE Buna	Santoprene Santoprene PTFE PTFE Buna	Chemical – Highest Diaphragm Life where Santoprene is required Chemical – Highest Diaphragm Life where Santoprene is required High Chemical Resistance where PVDF/PTFE is required High Chemical Resistance where PVDF/PTFE is required Oil, Waste Oil, Diesel, Coolant Typical Lube application. No ULP
	Husky 205 1/4" Husky 205 1/4" Husky 205 1/4" Husky 205 1/4"	D12096 D12091 D150A1 D11021	Poly Poly Poly Poly	Poly NPT/BSP Poly NPT/BSP PVDF NPT/BSP Acetal NPT/BSP	Check Valve Check Valve Check Valve Check Valve	Check Valve Check Valve Check Valve Check Valve	Santoprene PTFE PTFE PTFE	Chemical – Highest Diaphragm Life where Santoprene is required Highest Chemical Resistance where PTFE/Poly is required Highest Chemical Resistance where PTFE/PVDF is required Highest Chemical Resistance where PTFE is required

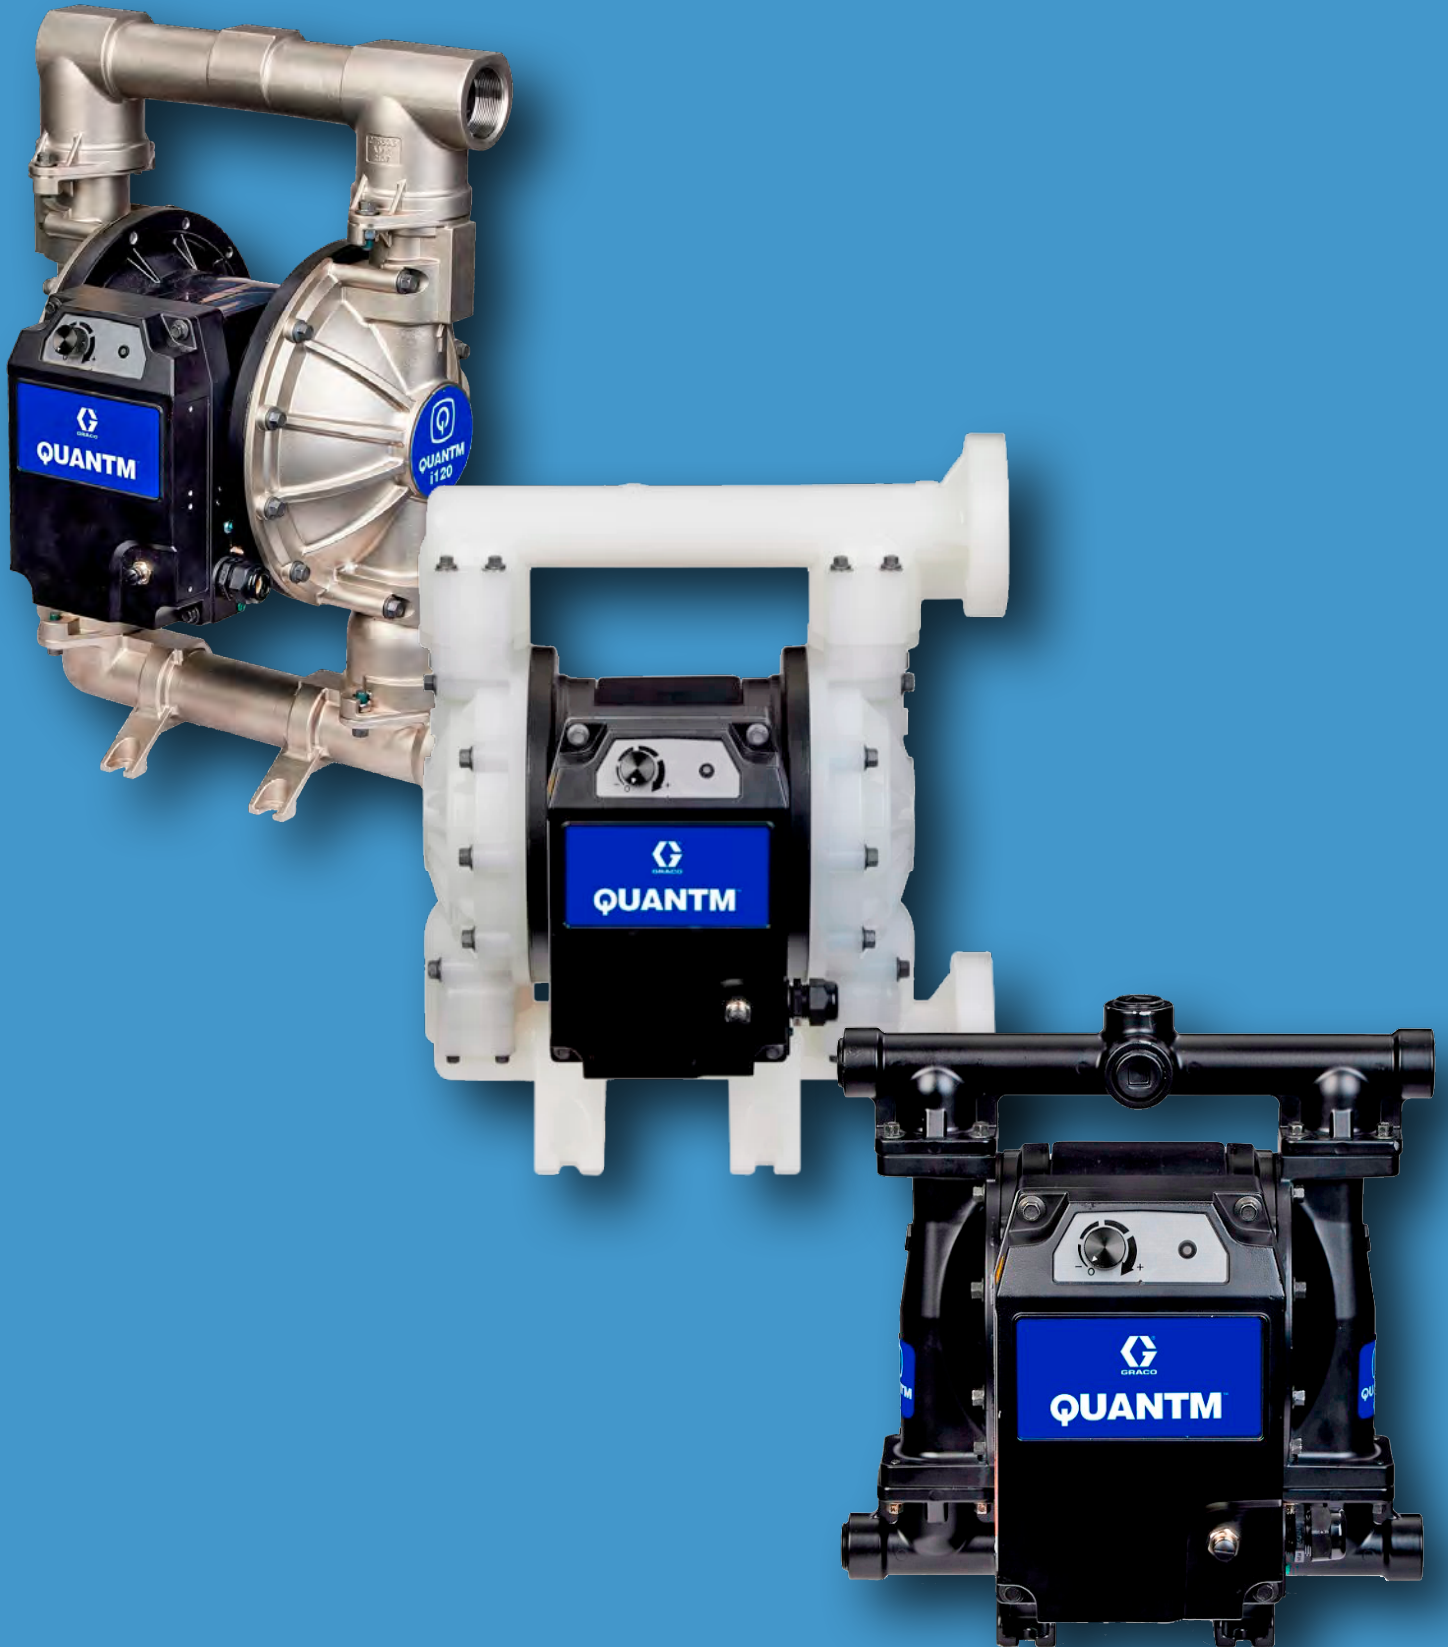
Quick Links

Sales Book: <https://salesbook.graco.com/>




Selector Tool: <https://www.graco.com/au/en/in-plant-manufacturing/support/tools/husky-selector-tool.html>

Chemical Compatibility Selector: <https://www.graco.com/au/en/in-plant-manufacturing/support/tools/chemical-compatibility.html>

QUANTM PUMPS



Quantm Common Pumps & Applications

Quantm Series	Part No	Pressure	Air X Ref	Loc	Manifolds	Seats	Balls	Dia	Typical Application
	TE120-0067	60 PSI	DF2911	Normal	End Poly Flange	Poly	PTFE	PTFE	Highest Chemical Resistance where PTFE is required
	TE120-0077	60 PSI	DF2966	Normal	End Poly Flange	Poly	Santo	Santo	Chemical - Highest Diaphragm Life where Santoprene can be used instead of PTFE
	TE120-0103	60 PSI	DF5A11	Normal	End PVDF Flange	PVDF	PTFE	PTFE	Highest Chemical Resistance where PVDF/PTFE is required & Poly is unacceptable
	TE120-0074	60 PSI	DFC311	Normal	Aluminium BSP	SS	PTFE	PTFE	Non Hazardous Location verify Elastomers/Manifolds chemical compatibility
	TE120-0200	60 PSI	DFC311	Haz	Aluminium BSP	SS	PTFE	PTFE	IECEx db IIb T4 Gb Hazardous Location verify material chemical compatibility
	TE120-0207	60 PSI	DFC525	Haz	Aluminium BSP	TPE	Acetal	TPE	IECEx db IIb T4 Gb Hazardous Location verify material chemical compatibility
	TE120-0065	60 PSI	DFCGGG	Normal	Aluminium BSP	Geo	Geo	Geo	Non Hazardous Location verify Elastomers/Manifolds chemical compatibility
	TE120-0078	60 PSI	DFD311	Normal	Stainless Steel BSP	SS	PTFE	PTFE	Extreme Chemical Resistance where PTFE/Stainless is required
	TE120-0204	60 PSI	DFD311	Haz	Stainless Steel BSP	SS	PTFE	PTFE	IECEx db IIb T4 Gb Hazardous Location verify material chemical compatibility
	TE80-0060	100 PSI	DB2911	Normal	End Poly Flange	Poly	PTFE	PTFE	Highest Chemical Resistance where PTFE is required
	TE80-0068	100 PSI	DB2966	Normal	End Poly Flange	Poly	Santo	Santo	Chemical - Highest Diaphragm Life where Santoprene can be used instead of PTFE
	TE80-0066	100 PSI	DBC311	Normal	Aluminium BSP	SS	PTFE	PTFE	Non Hazardous Location verify Elastomers/Manifolds chemical compatibility
	TE80-0182	100 PSI	DBC311	Haz	Aluminium BSP	SS	PTFE	PTFE	IECEx db IIb T4 Gb Hazardous Location verify material chemical compatibility
	TE80-0191	100 PSI	DBC525	Haz	Aluminium BSP	TPE	Acetal	TPE	IECEx db IIb T4 Gb Hazardous Location verify material chemical compatibility
	TE80-0059	100 PSI	DBC GGG	Normal	Aluminium BSP	Geo	Geo	Geo	Non Hazardous Location verify Elastomers/Manifolds chemical compatibility
	TE80-0072	100 PSI	DBD311	Normal	Stainless Steel BSP	SS	PTFE	PTFE	Extreme Chemical Resistance where PTFE/Stainless is required
	TE80-0188	100 PSI	DBD311	Haz	Stainless Steel BSP	SS	PTFE	PTFE	IECEx db IIb T4 Gb Hazardous Location verify material chemical compatibility
	TE30-0424	100 PSI	647097	Haz	Aluminium BSP	TPE	Acetal	TPE	IECEx db IIb T4 Gb Hazardous Location verify material chemical compatibility
	TE30-0167	100 PSI	647109	Normal	Aluminium BSP	SS	PTFE	PTFE	Non Hazardous Location verify Elastomers/Manifolds chemical compatibility
	TE30-0426	100 PSI	647109	Haz	Aluminium BSP	SS	PTFE	PTFE	IECEx db IIb T4 Gb Hazardous Location verify material chemical compatibility
	TE30-0166	100 PSI	647121	Normal	Aluminium BSP	Geo	Geo	Geo	Non Hazardous Location verify Elastomers/Manifolds chemical compatibility
	TE30-0268	100 PSI	649001	Normal	Cntr Poly Flange	Poly	Santo	Santo	Chemical - Highest Diaphragm Life where Santoprene can be used instead of PTFE
	TE30-0258	100 PSI	649006	Normal	Cntr Poly Flange	Poly	PTFE	PTFE	Highest Chemical Resistance where PTFE is required
	TE30-0269	100 PSI	649029	Normal	End Poly Flange	Poly	Santo	Santo	Chemical - Highest Diaphragm Life where Santoprene can be used instead of PTFE
	TE30-0257	100 PSI	649034	Normal	End Poly Flange	Poly	PTFE	PTFE	Highest Chemical Resistance where PTFE is required
	TE30-0274	100 PSI	649384	Normal	Cntr PVDF Flange	PVDF	PTFE	PTFE	Highest Chemical Resistance where PTFE is required
	TE30-0273	100 PSI	649398	Normal	End PVDF Flange	PVDF	PTFE	PTFE	Highest Chemical Resistance where PVDF/PTFE is required & Poly is unacceptable
	TE30-0161	100 PSI	651032	Normal	Stainless Steel BSP	SS	PTFE	PTFE	Extreme Chemical Resistance where PTFE/Stainless is required
	TE30-0420	100 PSI	651032	Haz	Stainless Steel BSP	SS	PTFE	PTFE	IECEx db IIb T4 Gb Hazardous Location verify material chemical compatibility

* For IECEx Hazardous locations Leak Detector "25F109" is recommended

QUANTM™ ELECTRIC PUMP

Save Energy, Cut Costs & Run Cleaner

QUANTM isn't just another electric pump: it's a game-changer. QUANTM features a revolutionary electric motor design that will reduce operational costs and keep your production lines running.

It is a perfect fit for nearly any fluid application and a drop-in replacement for existing pumping technologies.

Protect your bottom line by converting to a QUANTM Electric Pump.

EFFICIENT ELECTRIC DRIVE

- Up to 80% less energy consumption
- Requires no compressed air
- No freezing

INTEGRATED CONTROLS

- Control flow and pressure at the pump
- I/O for remote operation

PROVEN ADD BENEFITS

- Stalls under pressure
- Self-priming
- Dry running
- Handles solids and abrasive materials

PLUG & PLAY

- Factory wired for quick install
- 240V
- Hazardous Location models available



SUSTAINABLE OPERATIONS



OPERATIONAL RESILIENCE



COST SAVINGS



SIMPLIFIED MAINTENANCE



GRACO'S GOT YOU COVERED

FACILITIES WORLDWIDE FOR GLOBAL SUPPORT



Quality First

At Graco we pride ourselves on providing best-in-class products. Engineered solutions are manufactured in our own facilities, with the highest standards in the industry. We provide you with world-class customer support and expertise to help solve your lubrication challenges.



Global Reach

Graco has facilities across the globe to provide you with the products and service *you* need, where *you* live. Plus, Graco has dedicated field experts in all areas of the world to support the products we sell.



Product Capabilities

Graco has a broad range of products to provide solutions that meet your needs. Our products are engineered and tested to perform in the harshest environments so you can be certain your equipment is protected and working at peak performance.

Graco Australia Pty Ltd
Suite 17, 2 Enterprise Drive
Bundoora, VIC 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599
Email: csaustralia@graco.com