

BAKER
HYDRAULICS
PTY LTD

A.B.N. 59 056 424 625



TELESCOPIC Displacement Type Hydraulic Cylinder



TWO STAGE DISPLACEMENT TYPE TELESCOPIC CYLINDER

**Ideal for tray tipper, car transporters,
agriculture spray booms etc.**

**Extends from 927 mm to 2420 mm
total open clevis pin centres**






TELESCOPIC Displacement Type Hydraulic Cylinder

- 1492mm total stroke
- Budget-priced to suit the medium range of tray-tip vehicles.
- Designed for maximum strength.
- Bevelled gland profile to aid external fluid run off.
- Bearing wear strips added to glands and stop rings to eliminate metal to metal contact.
- Standard 1" pin mounting.
- 3/4" UNF O-ring port.
- Non standard strokes available on request.

SPECIFICATIONS								
Performance details	Diameter		Stroke		Swept volume		Thrust (lbf)	
	Stage	mm	in	mm	in	Lt	gal	@ 2000 psi
	1	73	2.86	724	28.50	3.0	0.66	12,850
2	51	2.00	768	30.25	1.56	0.34	6,280	
Total			1,492	58.75	4.56	1		
Barrels and rods	Resistance to corrosion ensured by rods being fully oil-immersed when in closed position. Chromed rods.							

WARRANTY	
<p>The Company warrants its products to be free of defects in material or workmanship. The warranty shall be in effect for twelve (12) months from the date of despatch from the Companies works. As a condition of this warranty the purchaser shall notify the Company in writing of any claimed defect immediately upon discovery and shall return the item for inspection. Unless otherwise specified by the Company in writing the warranty is limited to the replacement or repair of the product and excludes cartage charges to or from the Companies premises. The warrant also excludes the company from liability for labour, travelling and similar incurred expenses in the disassembly or re-installation etc of the product. The Company accepts no liability for faults arising from the improper use or faulty maintenance of the product, its incorrect installation, its improper operation beyond recommended specifications or contingent or consequential loss or damage under any situation whatsoever. All unauthorised modifications to the product by the purchaser automatically voids the conditions of this warranty.</p>	

Information given herein is correct at the time of publication. The manufacturers are engaged in continuous product development and reserve the right to change specifications and procedures without prior notice.

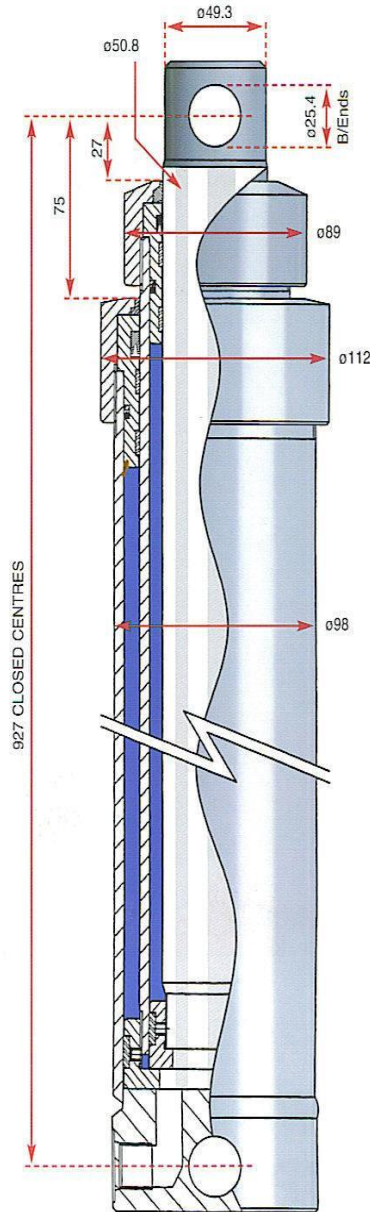

10-14 MAUD STREET, NEWSTEAD, 4006
P.O. BOX 50, FORTITUDE VALLEY, 4006
Email: sales@industrialhyd.com.au

PHONE: (07) 3854 1232

FAX: (07) 3252 2346